



REGULAR CAB 3500 140.5"WB DUALY 4x4

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

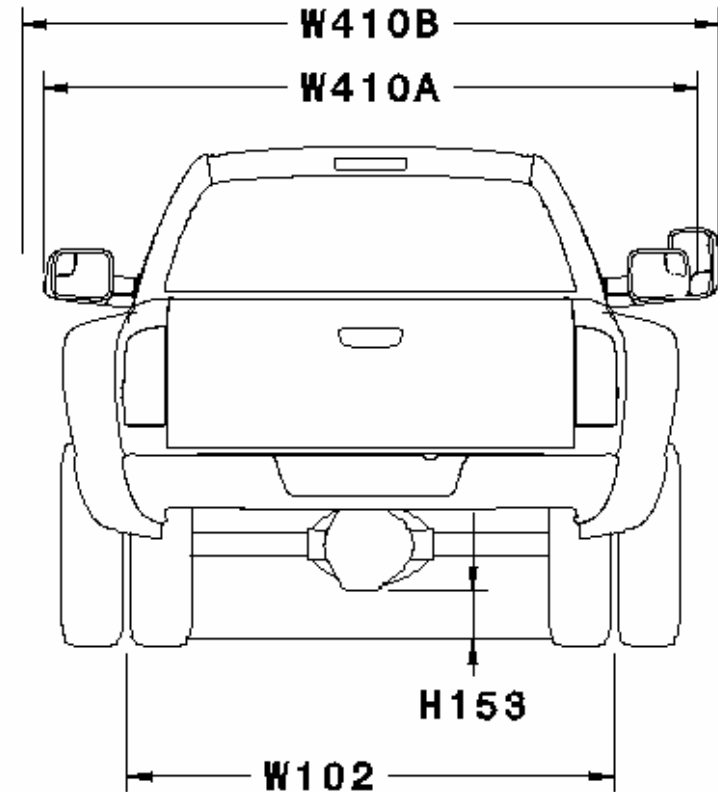

PLAN & SIDE VIEW

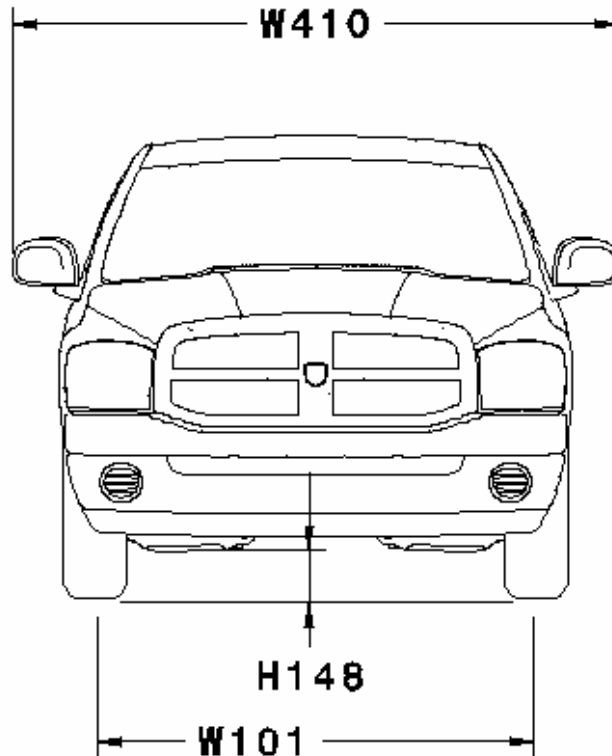

CHARTS

Site Map

Main Menu

Ram Home

PRINT


ALL

IN

OUT

REGULAR CAB 3500 140.5"WB DUALY 4X4

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

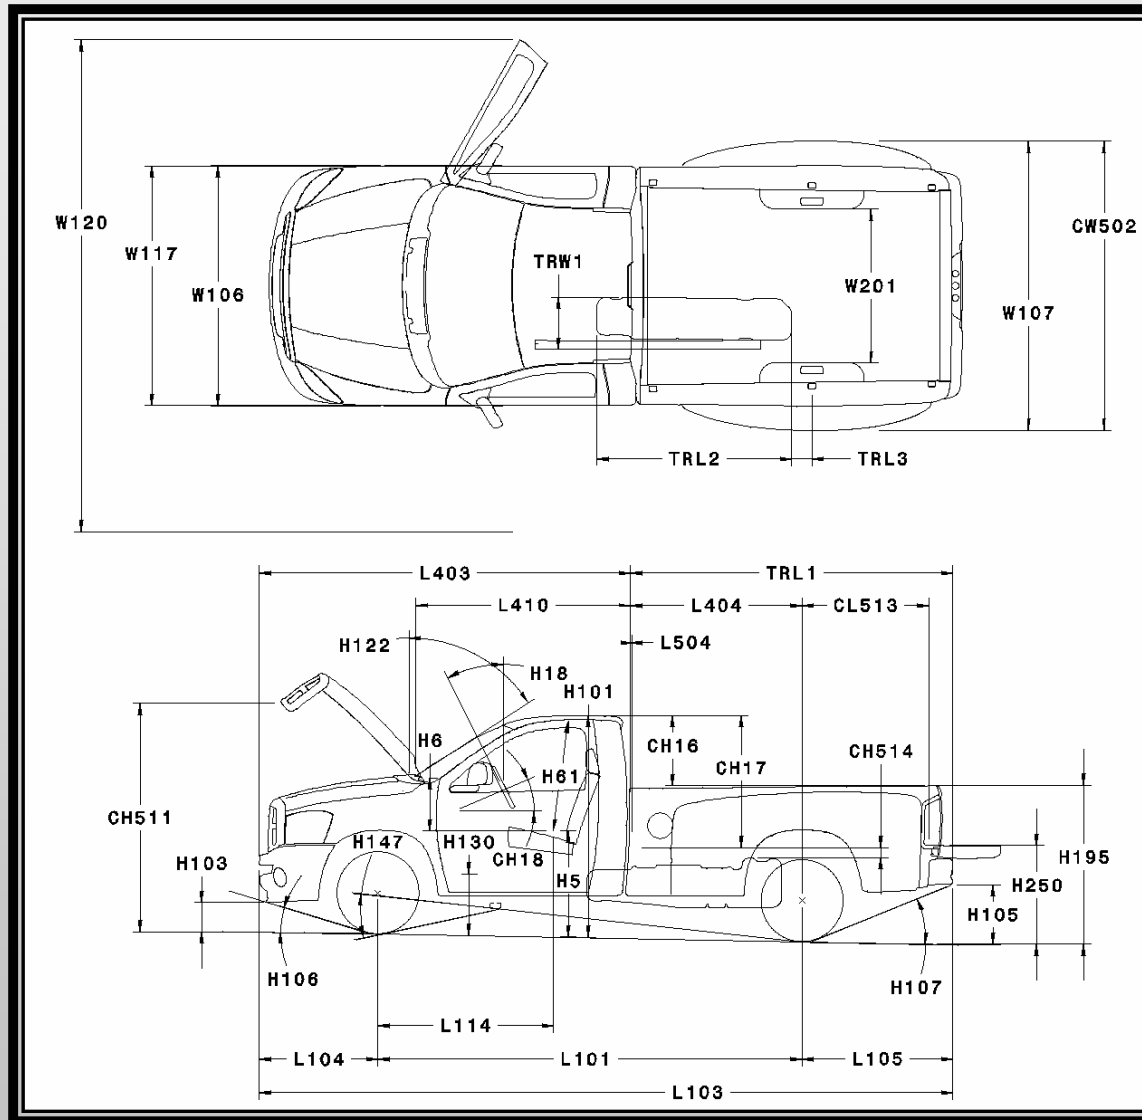

FRONT & REAR VIEW



CHARTS

[Site Map](#)

[Main Menu](#)

[Ram Home](#)

PRINT

ALL

IN

OUT

REGULAR CAB 3500 140.5"WB DUALY 4x4

Code	RAM REG CAB 8.0 BOX DUALY 140.5WB	Metric	English
L103	Vehicle Length	5834.2 mm	229.7 in
L403	Front of Bumper to Back of Cab	3122.2 mm	122.9 in
L410	Cab Length	1806.1 mm	71.1 in
L504	Cab to Pickup Body	17.4 mm	0.7 in
TRL1	Rear Bumper to Back of Cab	2712.0 mm	106.8 in
TRL2	Fuel Tank Length	1637.3 mm	64.5 in
Code	RAM REG CAB 8.0 BOX DUALY 140.5WB	Metric	English
CH16	Top of Box to Cab Roof	590.8 mm	23.3 in
CH17	Box Floor to Cab Roof	1114.0 mm	43.9 in
CH18	Steering Column Angle	22.9 deg	22.9 deg
CH514	Box Floor to Top of Fuel Tank	83.8 mm	3.3 in
H6	SgRP-Front to Windshield Lower DLO	446.2 mm	17.6 in
H18	Steering Wheel Angle	26.7 deg	26.7 deg
H61	Effective Head Room Front	1035.9 mm	40.8 in
H122	Window Slope Angle-Windshield	56.9 deg	56.9 deg
Code	RAM REG CAB 8.0 BOX DUALY 140.5WB	Metric	English
CW502	Maximum Box width-outer(Dualies)	2438.2 mm	96.0 in
TRW1	Outside Rail to Fuel Tank(inside)	437.4 mm	17.2 in
W106	Front Fender Width	2020.7 mm	79.6 in
W107	Rear Fender Width	2437.9 mm	96.0 in
W117	Body Width At SgRP-Front	2018.9 mm	79.5 in
W120	Vehicle Width-Front Doors Open	4138.4 mm	162.9 in
W201	Cargo Width-Wheelhouse	1295.4 mm	51.0 in
W410	Vehicle Width-Mirrors(std)	2396.2 mm	94.3 in
W410A	Vehicle Width-Mirrors(opt)	2587.1 mm	101.9 in
W410B	Vehicle Width-Mirrors(trailer)	2751.4 mm	108.3 in



TIRE CHART



FRONT & REAR VIEW



PLAN & SIDE VIEW

Site Map

Main Menu

Ram Home

PRINT



REGULAR CAB 3500 140.5"WB DUALY 4X4

Code	RAM REG CAB 8.0 BOX 3500 DUALY 4X4 140.5WB	LT235/80R17	
		Metric	English
CH511	Bottom of Open Hood to Ground	2070.7 mm	81.5 in
CHR22	Turn Circle Diameter (feet/meters)*	13.5 m	44.2 ft
CL513	Rear Axle to Inside Box at Rear	1069.4 mm	42.1 in
H5	SgRP-Front to Ground	1022.8 mm	40.3 in
H101	Vehicle Height(curbLoad)	1999.4 mm	78.7 in
H103	Front Bumper to Ground(curbwt.)	391.7 mm	15.4 in
H105	Rear Bumper to Ground(curbwt.)	614.6 mm	24.2 in
H106	Angle of Approach	24.8 deg	24.8 deg
H107	Angle of Departure	27.9 deg	27.9 deg
H108	Static Load-Tire Radius-Front*	376.2 mm	14.8 in
H109	StaticLoad-Tire Radius-Rear*	372.1 mm	14.6 in
H130	Step Height - Front(curbweight)	655.2 mm	25.8 in
H147	Ramp Breakover Angle	25.5 deg	25.5 deg
H148	Suspension or Axel to Ground-Front	209.2 mm	8.2 in
H153	Suspension or Axel to Ground-Rear	192.8 mm	7.6 in
H195	Liftover Height	1450.3 mm	57.1 in
H250	Open Tailgate to Ground	944.1 mm	37.2 in
L101	Wheelbase	3563.7 mm	140.3 in
L104	Overhang-Front	1002.0 mm	39.4 in
L105	Overhang-Rear	1268.6 mm	49.9 in
L114	Front Wheel to Front SgRP c/l	1471.6 mm	57.9 in
L404	Cab to Rear Axle	1443.4 mm	56.8 in
TRL3	Rear Wheel Center line to Fuel Tank	170.5 mm	6.7 in
W101	Tire Track-front	1764.3 mm	69.5 in
W102	Tire Track-rear	1925.6 mm	75.8 in


[● Site Map](#)
[● Main Menu](#)
[● Ram Home](#)
[PRINT](#)