



REGULAR CAB 2500 140.5"WB 4x2

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

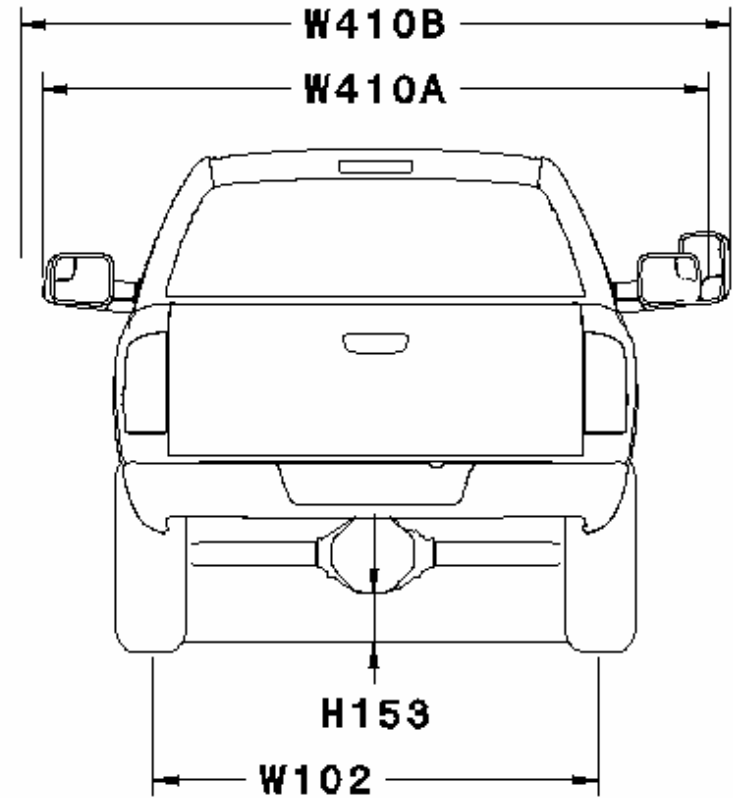

PLAN & SIDE VIEW

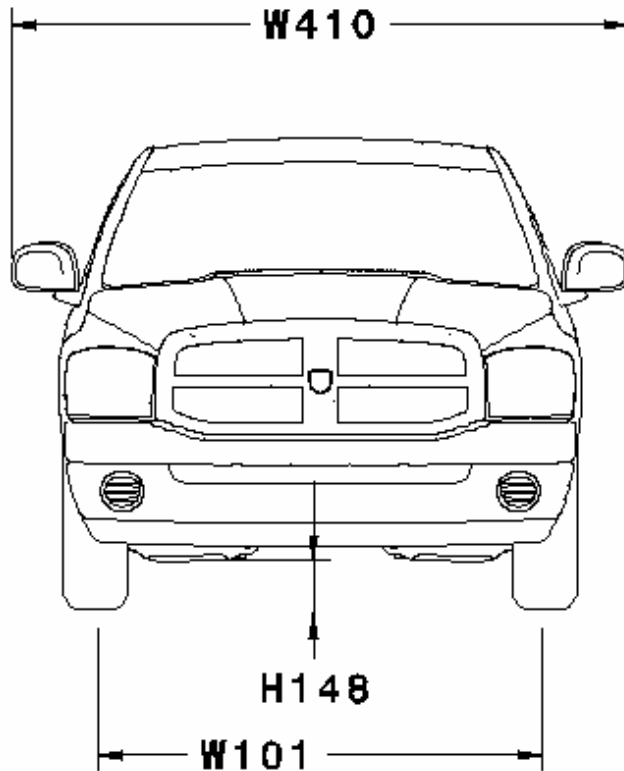

CHARTS

Site Map

Main Menu

Ram Home

PRINT


ALL

IN

OUT

REGULAR CAB 2500 140.5"WB 4x2

POSITION THE MOUSE OVER THE CODE FOR INSTANT DIMENSION

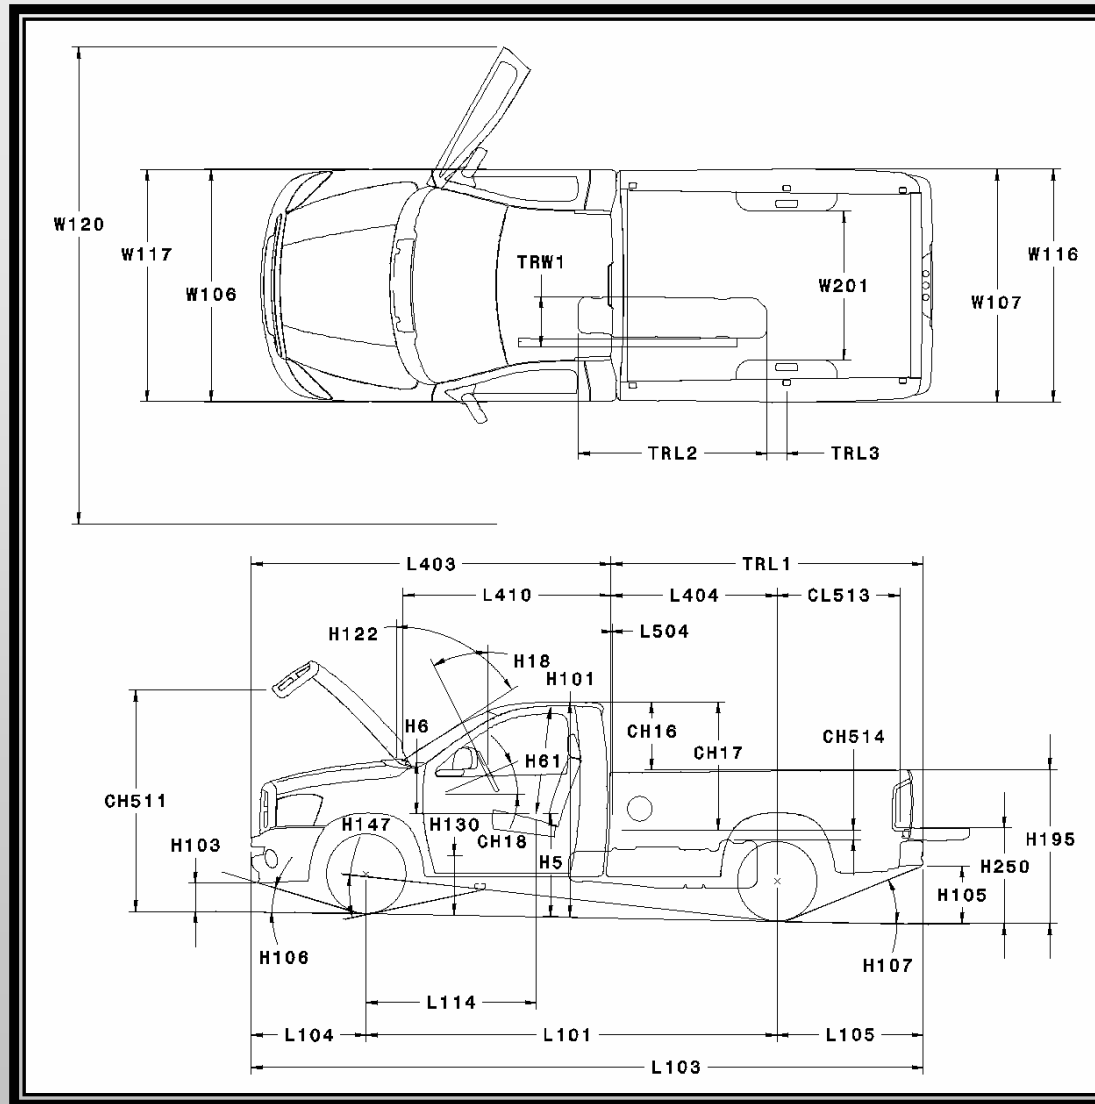

FRONT & REAR VIEW



CHARTS

[Site Map](#)

[Main Menu](#)

[Ram Home](#)

PRINT

ALL

IN

OUT

REGULAR CAB 2500 140.5"WB 4x2

Code	RAM REG CAB 8.0 BOX 1500 140.5WB	Metric	English
L103	Vehicle Length	5834.2 mm	229.7 in
L403	Front of Bumper to Back of Cab	3122.2 mm	122.9 in
L410	Cab Length	1806.1 mm	71.1 in
L504	Cab to Pickup Body	17.4 mm	0.7 in
TRL1	Rear Bumper to Back of Cab	2712.0 mm	106.8 in
TRL2	Fuel Tank Length	1637.3 mm	64.5 in
Code	RAM REG CAB 8.0 BOX 1500 140.5WB	Metric	English
CH16	Top of Box to Cab Roof	590.8 mm	23.3 in
CH17	Box Floor to Cab Roof	1114.0 mm	43.9 in
CH18	Steering Column Angle	22.9 deg	22.9 deg
CH514	Box Floor to Top of Fuel Tank	83.8 mm	3.3 in
H6	SgRP-Front to Windshield Lower DLO	446.2 mm	17.6 in
H18	Steering Wheel Angle	26.7 deg	26.7 deg
H61	Effective Head Room Front	1035.9 mm	40.8 in
H122	Window Slope Angle-Windshield	56.9 deg	56.9 deg
Code	RAM REG CAB 8.0 BOX 1500 140.5WB	Metric	English
TRW1	Outside Rail to Fuel Tank(inside)	437.4 mm	17.2 in
W106	Front Fender Width	2020.7 mm	79.6 in
W107	Rear Fender Width	2021.7 mm	79.6 in
W116	Body Width-maximum	2021.8 mm	79.6 in
W117	Body Width At SgRP-Front	2018.9 mm	79.5 in
W120	Vehicle Width-Front Doors Open	4138.4 mm	162.9 in
W201	Cargo Width-Wheelhouse	1295.4 mm	51.0 in
W410	Vehicle Width-Mirrors(std)	2396.2 mm	94.3 in
W410A	Vehicle Width-Mirrors(opt)	2587.1 mm	101.9 in
W410B	Vehicle Width-Mirrors(trailer)	2751.4 mm	108.3 in



TIRE CHART



FRONT & REAR VIEW



PLAN & SIDE VIEW

[Site Map](#)

[Main Menu](#)

[Ram Home](#)

PRINT



REGULAR CAB 2500 140.5"WB 4x2

Code	RAM REG CAB 8.0 BOX 2500 4X2 140.5WB	LT245/70R17		LT265/70R17	
		Metric	English	Metric	English
CH511	Bottom of Open Hood to Ground	1935.7 mm	76.2 in	1944.4 mm	76.6 in
CHR22	Turn Circle Diameter (feet/meters)*	14.3 m	47.0 ft	14.3 m	47.0 ft
CL513	Rear Axle to Inside Box at Rear	1067.2 mm	42.0 in	1067.2 mm	42.0 in
H5	SgRP-Front to Ground	900.0 mm	35.4 in	908.7 mm	35.8 in
H101	Vehicle Height(curbLoad)	1877.8 mm	73.9 in	1886.4 mm	74.3 in
H103	Front Bumper to Ground(curbwt.)	256.2 mm	10.1 in	264.8 mm	10.4 in
H105	Rear Bumper to Ground(curbwt.)	509.8 mm	20.1 in	518.4 mm	20.4 in
H106	Angle of Approach	16.4 deg	16.4 deg	17.0 deg	17.0 deg
H107	Angle of Departure	23.4 deg	23.4 deg	23.8 deg	23.8 deg
H108	Static Load-Tire Radius-Front*	363.5 mm	14.3 in	363.5 mm	14.3 in
H109	StaticLoad-Tire Radius-Rear*	363.5 mm	14.3 in	363.5 mm	14.3 in
H130	Step Height - Front(curbweight)	529.3 mm	20.8 in	538.0 mm	21.2 in
H147	Ramp Breakover Angle	16.2 deg	16.2 deg	16.9 deg	16.9 deg
H148	Suspension or Axel to Ground-Front	190.2 mm	7.5 in	188.9 mm	7.4 in
H153	Suspension or Axel to Ground-Rear	180.3 mm	7.1 in	224.9 mm	8.9 in
H195	Liftover Height	1344.6 mm	52.9 in	1353.3 mm	53.3 in
H250	Open Tailgate to Ground	838.9 mm	33.0 in	847.6 mm	33.4 in
L101	Wheelbase	3568.9 mm	140.5 in	3568.9 mm	140.5 in
L104	Overhang-Front	999.0 mm	39.3 in	998.9 mm	39.3 in
L105	Overhang-Rear	1266.4 mm	49.9 in	1266.4 mm	49.9 in
L114	Front Wheel to Front SgRP c/l	1474.6 mm	58.1 in	1474.6 mm	58.1 in
L404	Cab to Rear Axle	1445.6 mm	56.9 in	1445.6 mm	56.9 in
TRL3	Rear Wheel Center line to Fuel Tank	172.7 mm	6.8 in	172.7 mm	6.8 in
W101	Tire Track-front	1742.4 mm	68.6 in	1742.4 mm	68.6 in
W102	Tire Track-rear	1731.5 mm	68.2 in	1731.5 mm	68.2 in



[Site Map](#)

[Main Menu](#)

[Ram Home](#)

[PRINT](#)

[ALL](#)

[IN](#)

[OUT](#)