



# QUAD CAB 1500 140.5"WB 4x4 SPRING SUSPENSION

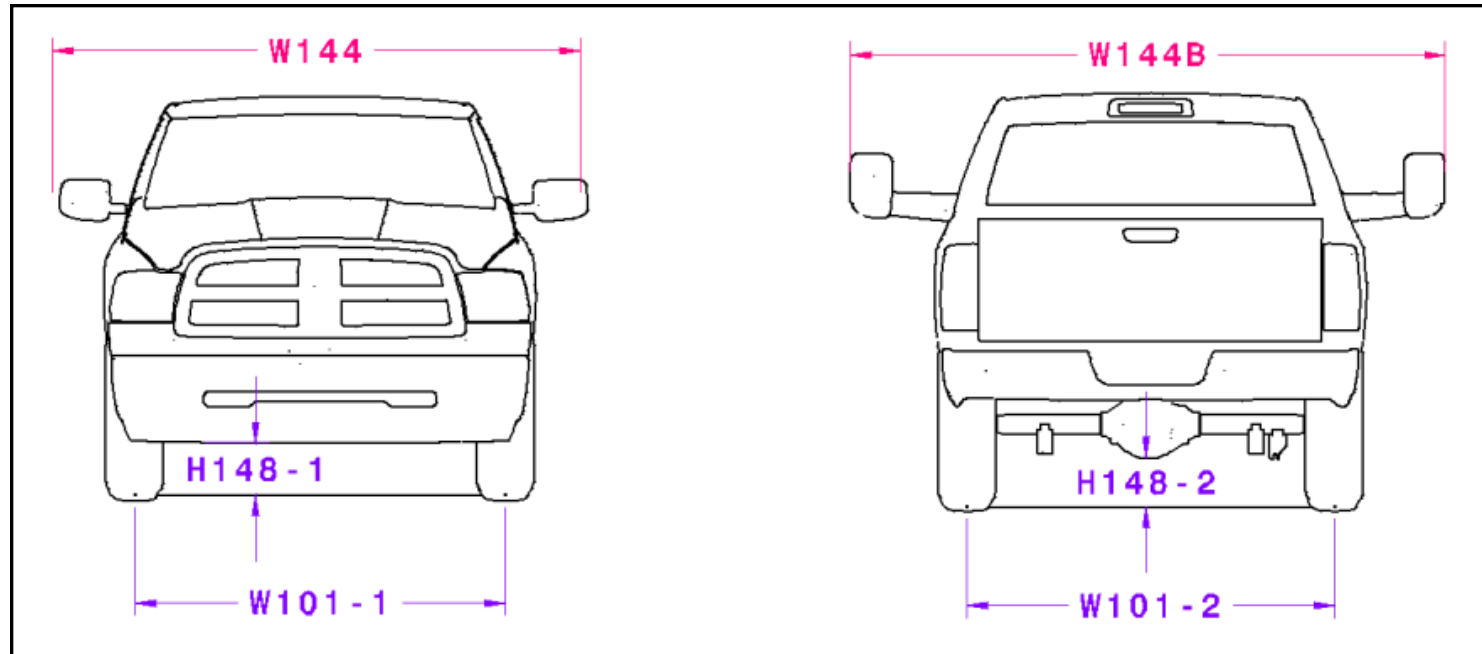

# QUAD CAB 1500 140.5"WB 4x4 SPRING SUSPENSION

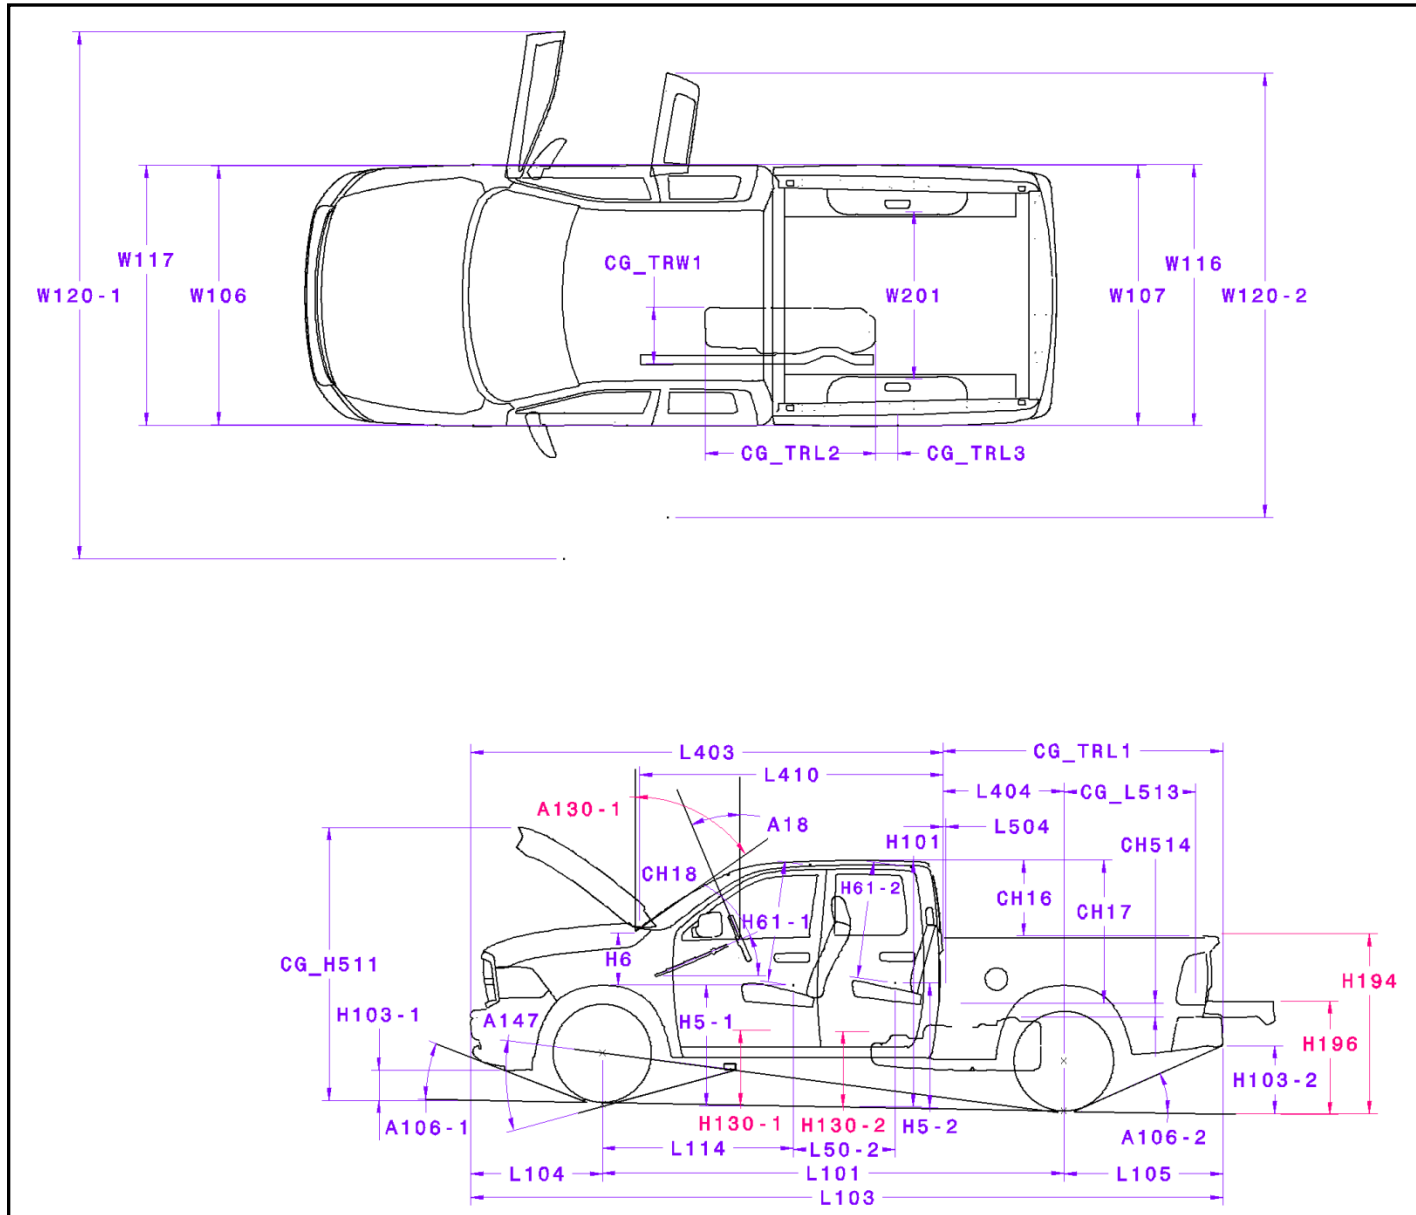

# QUAD CAB 1500 140.5"WB 4x4 SPRING SUSPENSION

Code	RAM QUAD CAB 6.5 BOX 140.5WB	Metric	English
CG_TRL1	Rear Bumper to Back of Cab	2166.6 mm	85.3 in
CG_TRL2	Fuel Tank Length	1317.5 mm	51.9 in
L50-2	SgRP Couple Distance, Front to Second	787.4 mm	31.0 in
L103	Vehicle Length	5816.5 mm	229.0 in
L403	Front Bumper to Back of Cab (BBC)	3649.9 mm	143.7 in
L410	Cab Length	2346.4 mm	92.4 in
L504	Cab to Pickup Body	21.0 mm	0.8 in

Code	RAM QUAD CAB 6.5 BOX 140.5WB	Metric	English
A130-1	Glazing Angle - Windscreen	56.4 deg	56.4 deg
CG_A18	Steering Wheel Angle	22.9 deg	22.9 deg
CH16	Top of Box to Cab Roof	585.5 mm	23.1 in
CH17	Box Floor to Cab Roof	1106.7 mm	43.6 in
CH18	Steering Column Angle	22.9 deg	22.9 deg
CH514	Box Floor to Top of Fuel Tank	107.5 mm	4.2 in
H6	SgRP - Front to Windshield Lower DLO	405.8 mm	16.0 in
H61-1	Effective Head Room - Front	1040.5 mm	41.0 in
H61-2	Effective Head Room - Second	1007.2 mm	39.7 in

Code	RAM QUAD CAB 6.5 BOX 140.5WB	Metric	English
CG_TRW1	Outside Rail to Fuel Tank(inside)	439.0 mm	17.3 in
W144	Vehicle Width-Mirrors Included (Std)	2463.3 mm	97.0 in
W144B	Vehicle Width-Mirrors Included (Trailer)	2776.1 mm	109.3 in
W106	Fender Width - Front	2003.6 mm	78.9 in
W107	Fender Width - Rear	2013.8 mm	79.3 in
W116	Body Width-maximum	2017.4 mm	79.4 in
W117	Body Width At SgRP - Front	2008.9 mm	79.1 in
W120-1	Vehicle Width, Doors Open - Front	4076.6 mm	160.5 in
W120-2	Vehicle Width, Doors Open - Rear Row	3436.7 mm	135.3 in
W201	Cargo Width-Wheelhouse	1295.4 mm	51.0 in

# QUAD CAB 1500 140.5"WB 4X4 SPRING SUSPENSION

Code	Description	265/70R17		265/70R17 Outdoorsman		275/60R20		275/60R20 Outdoorsman	
		Metric	English	Metric	English	Metric	English	Metric	English
A106-1	Angle of Approach	17.8 deg	17.8 deg	22.4 deg	22.4 deg	19.3 deg	19.3 deg	23.9 deg	23.9 deg
A106-2	Angle of Departure	25.4 deg	25.4 deg	21.4 deg	21.4 deg	26.2 deg	26.2 deg	22.1 deg	22.1 deg
A147	Ramp Breakover Angle	20.5 deg	20.5 deg	17.8 deg	17.8 deg	21.6 deg	21.6 deg	18.8 deg	18.8 deg
CG_H511	Bottom of Open Hood to Ground	2134.0 mm	84.0 in	2154.6 mm	84.8 in	2150.2 mm	84.7 in	2170.6 mm	85.5 in
CG_L513	Rear Axle to Inside Box at Rear	1016.1 mm	40.0 in	1016.1 mm	40.0 in	1016.1 mm	40.0 in	1016.1 mm	40.0 in
CG_TRL3	Rear Wheel Center line to Fuel Tank	170.6 mm	6.7 in	170.6 mm	6.7 in	170.6 mm	6.7 in	170.6 mm	6.7 in
CG_TT18	Turn Circle Diameter (feet/meters)*	13.8 m	45.4 ft	13.7 m	45.0 ft	13.9 m	45.5 ft	13.9 m	45.5 ft
H5-1	SgRP to Ground - Front	948.4 mm	37.3 in	962.4 mm	37.9 in	964.1 mm	38.0 in	978.2 mm	38.5 in
H5-2	SgRP to Ground - Second	978.9 mm	38.5 in	990.7 mm	39.0 in	994.5 mm	39.2 in	1006.3 mm	39.6 in
H101	Vehicle Height(curbLoad)	1974.8 mm	77.7 in	1986.2 mm	78.2 in	1990.3 mm	78.4 in	2001.6 mm	78.8 in
H103-1	Fascia(Bumper) to Ground - Front	217.8 mm	8.6 in	274.8 mm	10.8 in	234.1 mm	9.2 in	291.3 mm	11.5 in
H103-2	Fascia(Bumper) to Ground - Rear	487.6 mm	19.2 in	493.6 mm	19.4 in	502.6 mm	19.8 in	508.3 mm	20.0 in
H108-1	Static Load Radius - Front Tire *	378.5 mm	14.9 in	377.2 mm	14.8 in	393.7 mm	15.5 in	393.4 mm	15.5 in
H108-2	Static Load Radius - Rear Tire *	386.1 mm	15.2 in	383.3 mm	15.1 in	401.3 mm	15.8 in	398.3 mm	15.7 in
H130-1	Step Height - Front	594.6 mm	23.4 in	609.6 mm	24.0 in	610.4 mm	24.0 in	625.4 mm	24.6 in
H130-2	Step Height - Second	598.7 mm	23.6 in	611.6 mm	24.1 in	614.4 mm	24.2 in	627.1 mm	24.7 in
H148-1	Suspension or Axel to Ground - Front	232.7 mm	9.2 in	232.7 mm	9.2 in	248.6 mm	9.8 in	248.6 mm	9.8 in
H148-2	Suspension or Axel to Ground - Rear	219.5 mm	8.6 in	219.5 mm	8.6 in	233.2 mm	9.2 in	233.2 mm	9.2 in
H194	Closed Endgate Height	1398.8 mm	55.1 in	1403.7 mm	55.3 in	1413.7 mm	55.7 in	1418.4 mm	55.8 in
H196	Lift In Height	885.3 mm	34.9 in	889.0 mm	35.0 in	900.1 mm	35.4 in	903.2 mm	35.6 in
L101	Wheelbase	3570.5 mm	140.6 in	3573.5 mm	140.7 in	3570.5 mm	140.6 in	3573.5 mm	140.7 in
L104	Overhang - Front	1016.0 mm	40.0 in	1013.0 mm	39.9 in	1016.0 mm	40.0 in	1013.0 mm	39.9 in
L105	Overhang - Rear	1230.1 mm	48.4 in	1233.0 mm	48.5 in	1230.1 mm	48.4 in	1233.0 mm	48.5 in
L114	Front Wheel Centerline toSgRP - Front	1475.8 mm	58.1 in	1478.9 mm	58.2 in	1475.8 mm	58.1 in	1478.9 mm	58.2 in
L404	Cab to Rear Axle (CA)	936.5 mm	36.9 in	936.5 mm	36.9 in	936.5 mm	36.9 in	936.5 mm	36.9 in
W101-1	Tread Width - Front Tires	1732.3 mm	68.2 in	1732.3 mm	68.2 in	1743.2 mm	68.6 in	1743.2 mm	68.6 in
W101-2	Tread Width - Rear Tires	1714.7 mm	67.5 in	1714.7 mm	67.5 in	1727.4 mm	68.0 in	1727.4 mm	68.0 in